

# METROCLAD®

EASY INSTALL, LOW COST CLADDING



A Met-TECH™ GUIDE


OCTOBER 2020



**Metroll®**

BETTER SERVICE • BETTER BUILDING SOLUTIONS

# METROCLAD®

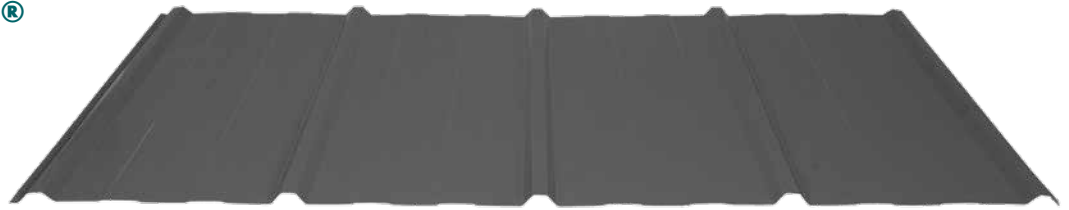

**Cover\*: 850 & 864mm Height: 12mm**

**\* Cover is available as 850mm and 864mm.**

**See the Sheet Coverage by Branch table on the following page.**

Metroclad® is low rib, custom length, high tensile steel wall cladding manufactured from 0.35mm and 0.42mm BMT COLORBOND®, ZINCALUME® and galvanised steel. Metroclad® is an ideal profile for rural, commercial and domestic applications; including tilt-up garage doors, screens, soffits, fascia and facade work.

## FEATURES & BENEFITS

- Low rib
- Easy installation
- Cost effective
- Custom lengths
- Versatile & durable


## METROCLAD® - WALLING

BMT mm	Steel Base Mpa	Mass CB * kg/m <sup>2</sup>	Mass Zinc kg/m <sup>2</sup>	Max Spans mm	
				End	Internal
0.35	G550	3.32	3.30	1250	1500
0.42	G550	3.90	3.83	1400	1700

CB = Colorbond®

## FASTENERS

Metroclad® may be fastened to timber or steel supports by valley fixing. There should be 4 fixings per sheet at ends and end laps, and 4 fixings per sheet at intermediate supports. Always face side laps away from the prevailing weather.



## TIMBER SUPPORTS

**WALLING** M6-11 x 25mm Roof Zips® Hex Head

## STEEL SUPPORTS 0.42mm to 3.5mm BMT

**WALLING** 10-16 x 16mm Metal Tek® Hex Head

## What is Met-TECH™?

Met-TECH™ is Metroll's Technical Resource Centre. It is the one stop shop for all of Metroll's product and technical information. Perfect for builders, contractors and specifiers to source all the information they may require. You can find other Met-TECH™ items on our website [www.metroll.com.au/resources](http://www.metroll.com.au/resources)

## SHEET COVERAGE BY BRANCH

METROLL BRANCH	850MM	864MM
Dubbo - NSW		✓
Lismore - NSW	✓	
Newcastle - NSW		✓
Sydney - NSW		✓
Tamworth - NSW		✓
Brisbane - QLD	✓	
Bundaberg - QLD	✓	
Mackay - QLD	✓	
Rockhampton - QLD	✓	
Toowoomba - QLD	✓	
Adelaide - SA		✓
Launceston - TAS		✓
Geelong - VIC		✓
Preston - VIC		✓

## LENGTH

Metroll supplies Metroclad® cut to order as required. Maximum recommended length is 8m. Lengths for manufacture need to be site measurements and not taken off plans. Length tolerance for Metroclad® is  $\pm 0 - 15\text{mm}$ .

## CARE, HANDLING & STORAGE

Care should be taken at all times when handling sheets to preserve the quality of the finish. Keep packs dry, stored clear of the ground and protected from rain and moisture. Any sheets which become wet should be separated, wiped and placed in the open air to dry.

## CUTTING

Cut sheets with a method and in a location so that damage is avoided to sheets and other building products. Material should be cut on the ground and not above other materials. Remove all swarf and debris from the work and installation area. Sheets may be cut using a power saw with a steel cutting blade, a power nibbler or with tin snips. Avoid using abrasive discs as these can cause edge and coating damage.

## CLEAN UP

Prior to departing the work site remove all foreign debris, screws, rivets and especially any swarf created by drilling or cutting from the roof surface and/or inside gutters. Failure to do so may result in premature corrosion of the roof or gutters.

## MATERIAL COMPATIBILITY

Never use lead flashings with Metroclad® sheeting made from COLORBOND® and ZINCALUME® steels. Lead, copper, bare metal and some chemically treated timbers are not compatible with Metroclad®.

## ADVERSE CONDITIONS

Localised environmental conditions can impact the corrosive nature of a site which may impact on material choice. Conditions that may impact on material choice include; direction of prevailing winds, rainfall intensity, duration of exposure, temperature, shelter and areas not washed by rainfall.

Contact your local Metroll branch if you intend to use Metroclad® within 1 km of industrial, chemical, marine or corrosive environments.

## MATERIAL SPECIFICATION & SCOPE


All walling should be specified on drawings as Metroclad®, manufactured by Metroll and installed in accordance with the manufacturers recommendations. Base sheet steel is G550 / AZ150 with specified finish.

## AVAILABILITY & DELIVERY

Metroclad® is available from the national network of Metroll branches. Contact your local Metroll branch for lead times, colours and availability.

Ensuring suitable arrangements are made to assist the unloading of Metroll trucks will help supply material in good order. When lifting long lengths by crane please ensure the load is evenly spread. Where a crane cannot be made available it is the customers responsibility to provide sufficient labour to assist the driver in unloading.

Can we assist with any additional  
Steel Building Products?

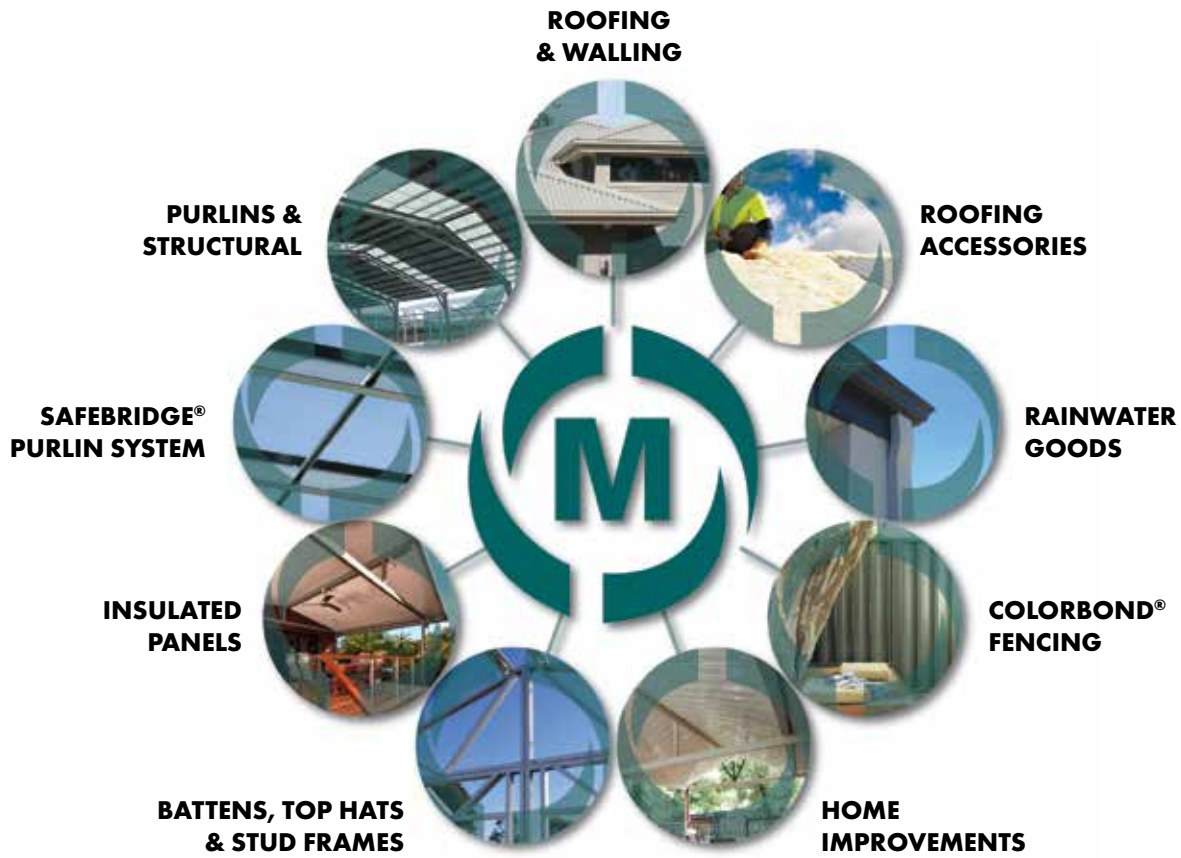

**QLD**

Cairns 07 4054 0888  
Townsville 07 4779 8266  
Mackay 07 4968 1255  
Rockhampton 07 4920 0900  
Bundaberg 07 4155 5999  
Toowoomba 07 4634 6144  
Sunshine Coast 07 5493 7872  
Brisbane 07 3375 0100

**NSW**

Lismore 02 6622 6677  
Tamworth 02 6765 4799  
Newcastle 02 4954 5799  
Sydney 1300 766 346  
Dubbo 02 6883 4800  
Wagga Wagga 02 5924 4500  
Canberra 02 6298 2777

**VIC**

Preston 03 9480 3744  
Laverton 03 8369 8300  
Geelong 03 5248 2006  
Ballarat 03 5335 6416  
Pakenham 03 8710 9300

**SA**

Adelaide 08 8282 3300

**TAS**

Launceston 03 6335 8555

**NT**

Darwin 08 8935 9555

**WA**

Perth 08 9365 5444  
Bunbury 08 9796 9796  
Albany 08 9841 6966

**26 Metroll Branches Nationwide**

Visit our website  
[metroll.com.au](http://metroll.com.au)



All reasonable care has been taken in the compilation of the information contained in this brochure. All recommendations on the use of Metroll products are made without guarantee as conditions of use are beyond the control of Metroll. It is the customers responsibility to ensure that the product is fit for its intended purpose and that the actual conditions of use are suitable. Metroll pursues a policy of continuous development and reserves the right to amend specifications without prior notice. The Metroll M and Logo are registered trademarks of Metroll. COLORBOND®, ZINCALUME®, GALVSPAN® steels are all registered trademarks of BlueScope Steel Limited.