



METROLL NAILSTRIP ROOFING & CLADDING

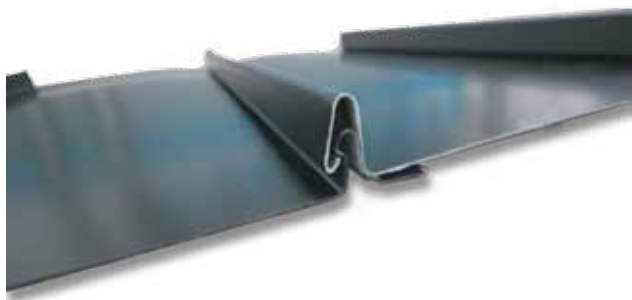

Metroll Nailstrip Roofing & Cladding is an innovative concealed fix panel system with a vast range of design applications for residential and commercial projects.


This exceptional product has received phenomenal response due to its long lines, abundant capacity for creative application and ease of install.



metroll architectural collection


The Metroll Architectural Collection is a range of innovative and contemporary Roofing & Walling products. The many options for application provides limitless scope for design; and the quick and easy installation saves costs and time. The collection includes Interlocking Cladding, Standing Seam and Nailstrip Roofing & Cladding.

Panel Widths	185mm	285mm	385mm
Panel widths are adjustable. Min. 185mm. Max. 465mm.			
Rib Height	25mm	38mm	
Panel Length	Up to 8 metres		

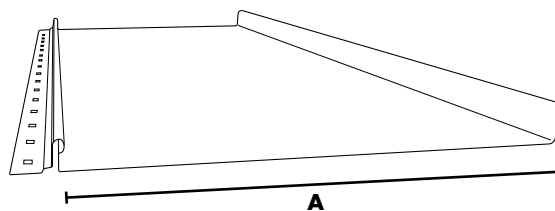

Material Availability

0.55mm BMT COLORBOND® steel | COLORBOND® Ultra | COLORBOND® Metallic | ZINCALUME® steel.



metroll
architectural
collection

METROLL NAILSTRIP ROOFING & CLADDING

Installation


Nailstrip panel is installed via nail or screw fixings. Each strip is snapped over the adjoining panel securing it in place and concealing the fixing. Installation is simple and quick with no need for seaming tools.

Fixing


Roofing: Installation on 19mm structural plywood to AS2269 with breathable, waterproof membrane. Screw fix directly through slotted holes in panel.

Walling: Installation on 19mm structural plywood to AS2269 with breathable, waterproof membrane; or fix to battens or Top Hats at maximum 600mm centres and with breathable, waterproof membrane. Screw fix directly through slotted holes in panel every 300mm.

Oil Canning is the looseness which can develop in the flat pan of cold formed metal products and which can affect the aesthetic of the finished installation. It is not a structural defect. Oil Canning is caused by many factors, various measures applied during product installation can mitigate the risks. Oil Canning can occur with any colour finish, but is generally more evident with darker colours. Metroll recommend designers take this into consideration.

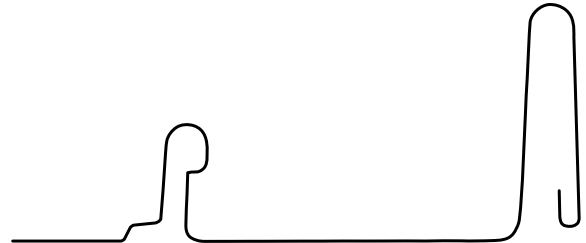

Panel profile

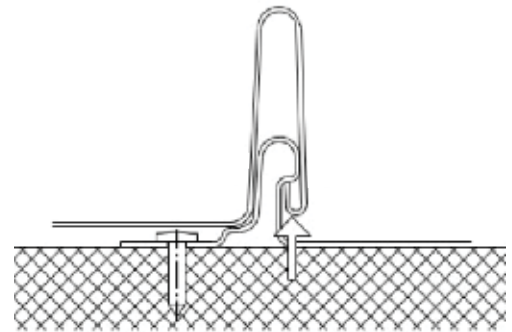

Concealed fix



METROLL VICTORIA

102 William Angliss Drive | Laverton North, VIC 3026 | P: 03 8369 8300
55 Wills Crescent | Moolap, Geelong VIC 3224 | P: 03 5248 2006
7 - 9 Rapid Way | Pakenham, VIC 3810 | P: 8710 9300
1 - 11 Bellevue Crescent | Preston, VIC 3072 | P: 03 9480 3744
20 Wiltshire Lane | Ballarat, VIC 3356 | P: 03 5335 6416

METROLL SOUTH AUSTRALIA

9 Mengel Court | Salisbury South, SA 5106 | P: 08 8282 3300

 **Metroll**[®]
BETTER SERVICE • BETTER BUILDING SOLUTIONS
metroll.com.au